




EMS OFFSHORE SERVICE



EMS PONTON 7

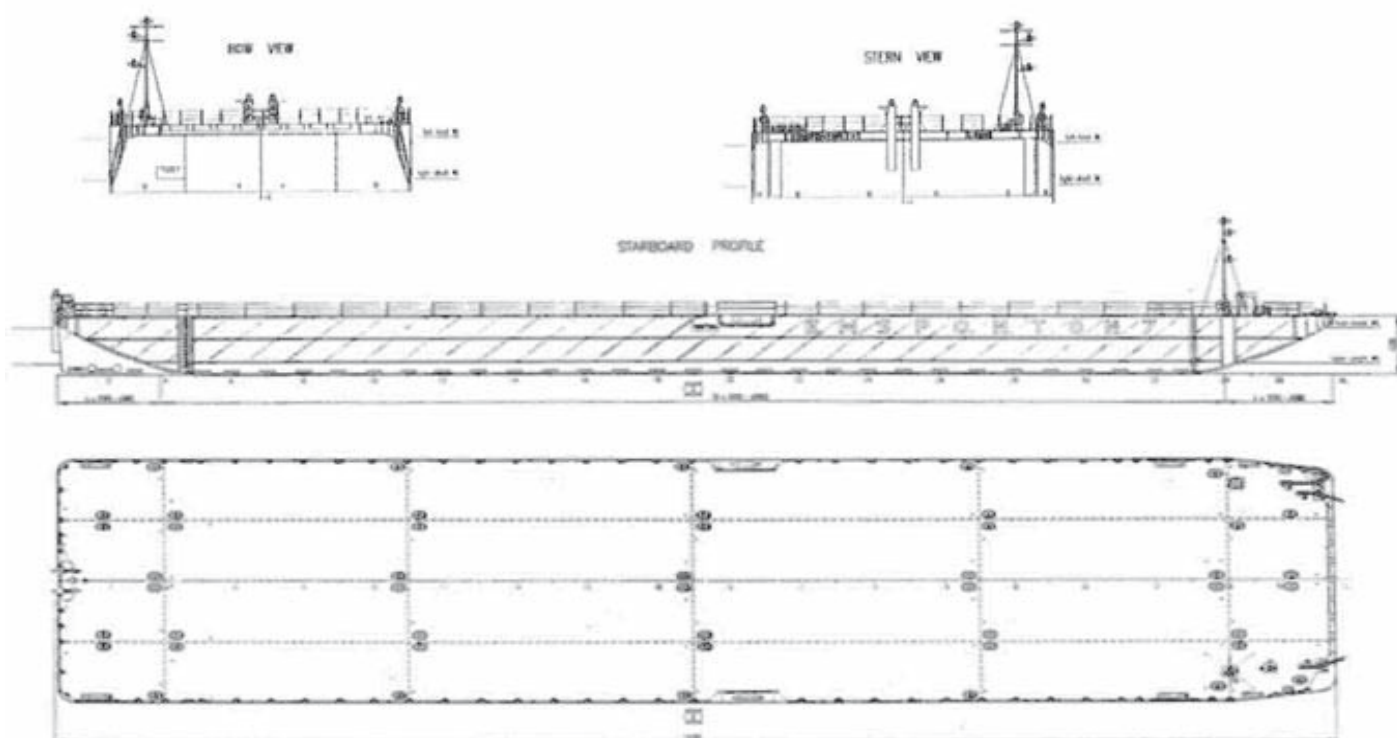

EMS PONTON 7

PRINCIPAL DIMENSIONS:

Length over all : 72,295 m
Length : 72,00 m
Beam over all : 18,99 m
Depth moulded : 4,50 m
Ligth draft : 0,75 m
Loaded draft : 3,60 m
Built : 2004 Russia
Class : G. L. + 100 A5 deep sea
Tonnage : 1.546 GT / 463 NT

CAPACITIES:

Deadweight : 4.400 to
Deckload : 10 to/ m²
Wheel load : 12 to at 10 bar
Point loads : 60 to at webframes
: 80 to at bulkheads
: 200 to at bulkhead cross

4 Ro Ro ramps: L: 12,00 m, B: 4 x 1,5 m = 6 m
In total 75 lashing eyes, BL: 50,0 tons

ARRANGEMENT & FORM:

Bow : Raked, Ro Ro conection
Stern : Raked with 2 skegs, 2 pushpipes aft.
Bulkheads : 3 longitudinal, 5 transverse
In total 24 compartments of which 23 can be used for ballast water.
Each compartment with 2 covers, deckplug & sounding pipe.
One compartment for chainlocker (Stb)
One compartment for storage (PS)

Deck completely flush.
Removable railing around.
Removable signal mast and anchor winch.
Position & stern lights : Gas

MOORING & TOWING:

Anchor : SSHP pool TW, 474 kg
Anchor chain : 165 m, Ø 24,0 mm
Anchor winch: Manual / with warping head
Towing arr. : 2 smith brackets & fairleads
Bridle : 2 x 12 m steel wire
Bollards : Double bollards fore & aft.
Double bollards flush at fr. 20/21